


TECHNICAL SPECIFICATION


P1200 - ANTI-SURF
PRODUCT CODE: 314516

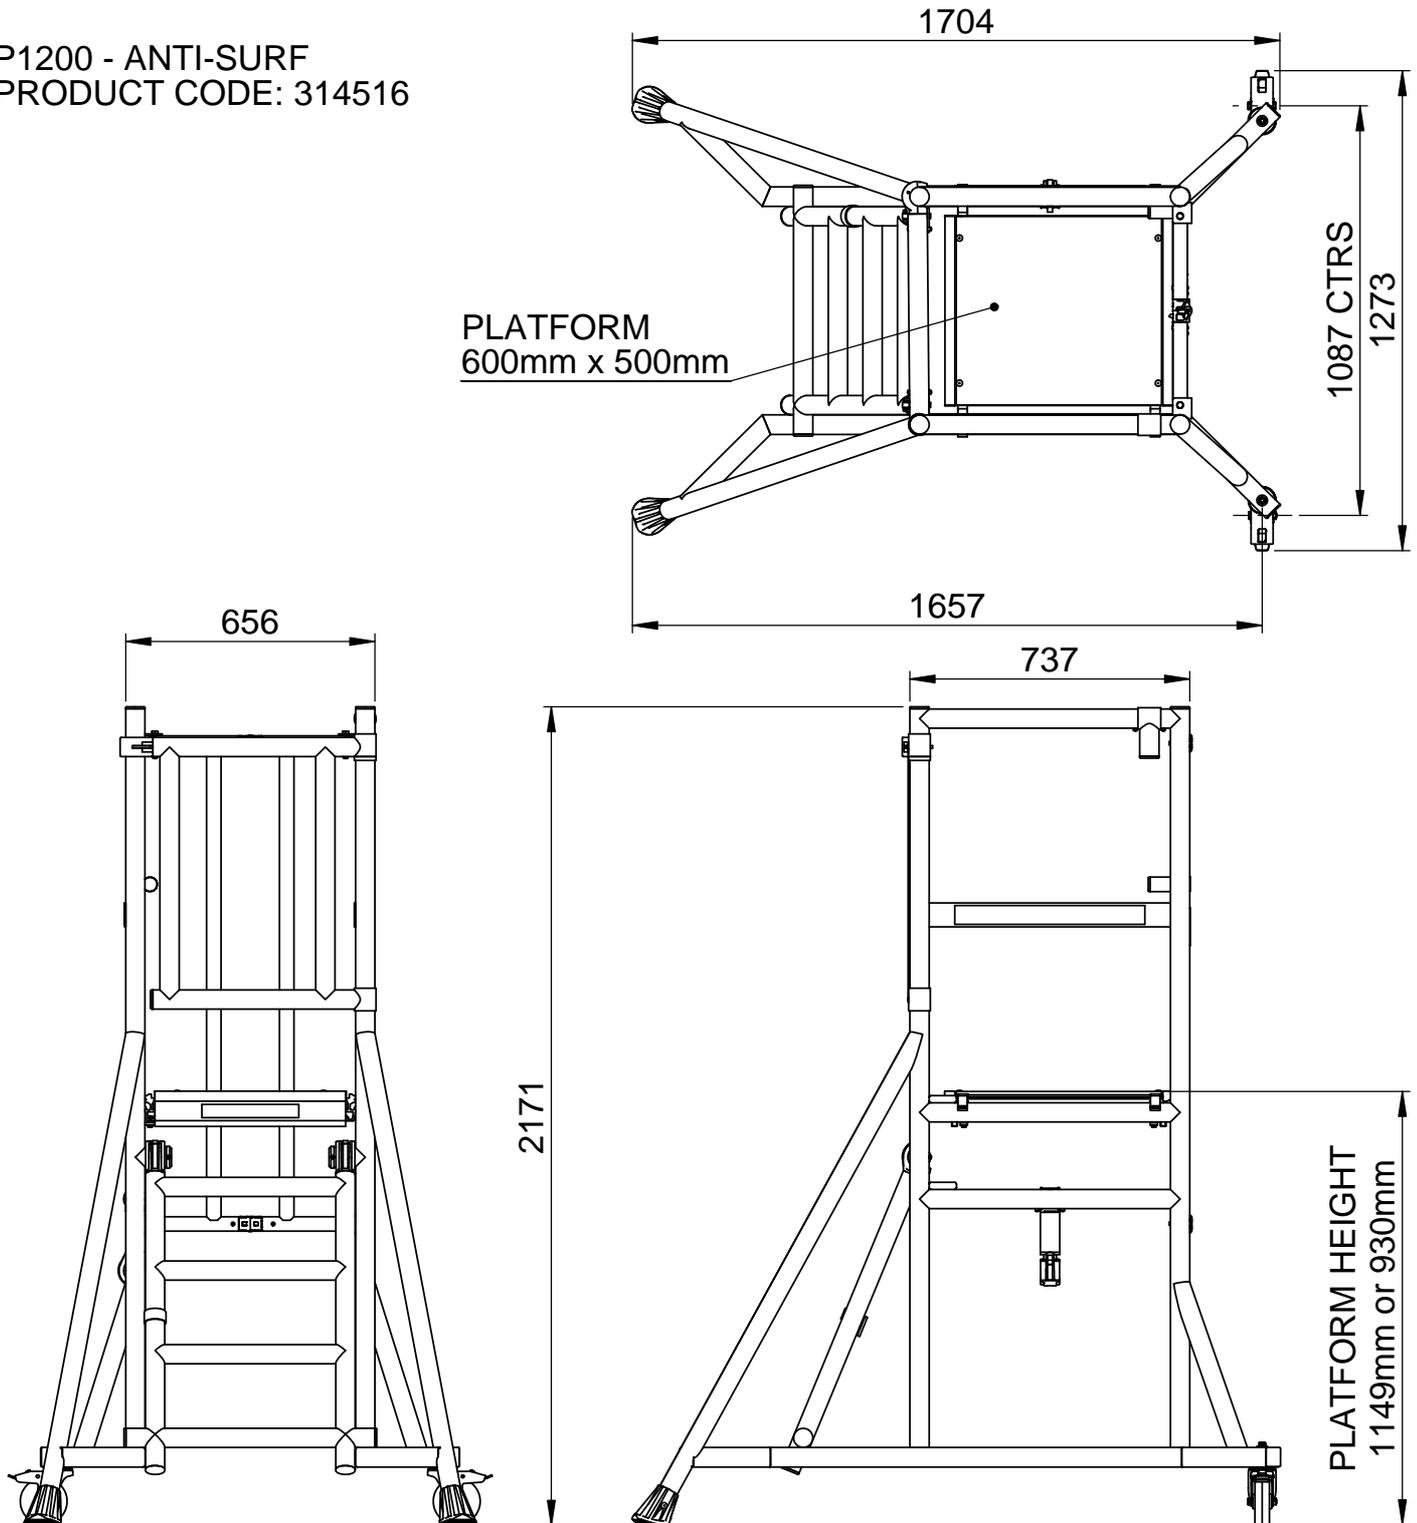

- Maximum safe working height (SWH)	- 3.15m*
- Maximum safe working load (SWL)	- 150kg (One person + Materials + Tools)
- Weight	- 33kg
* SWH based on maximum height plus 2.0m above the platform. Greater working heights are possible (E.g. when working overhead on ceilings, but you should never over reach)	
- All castors must be locked in position, facing outwards as shown, before using the workstation	
- Never apply forces greater than 10kg sideways or 20kg when facing forwards	

ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED

MATERIALS

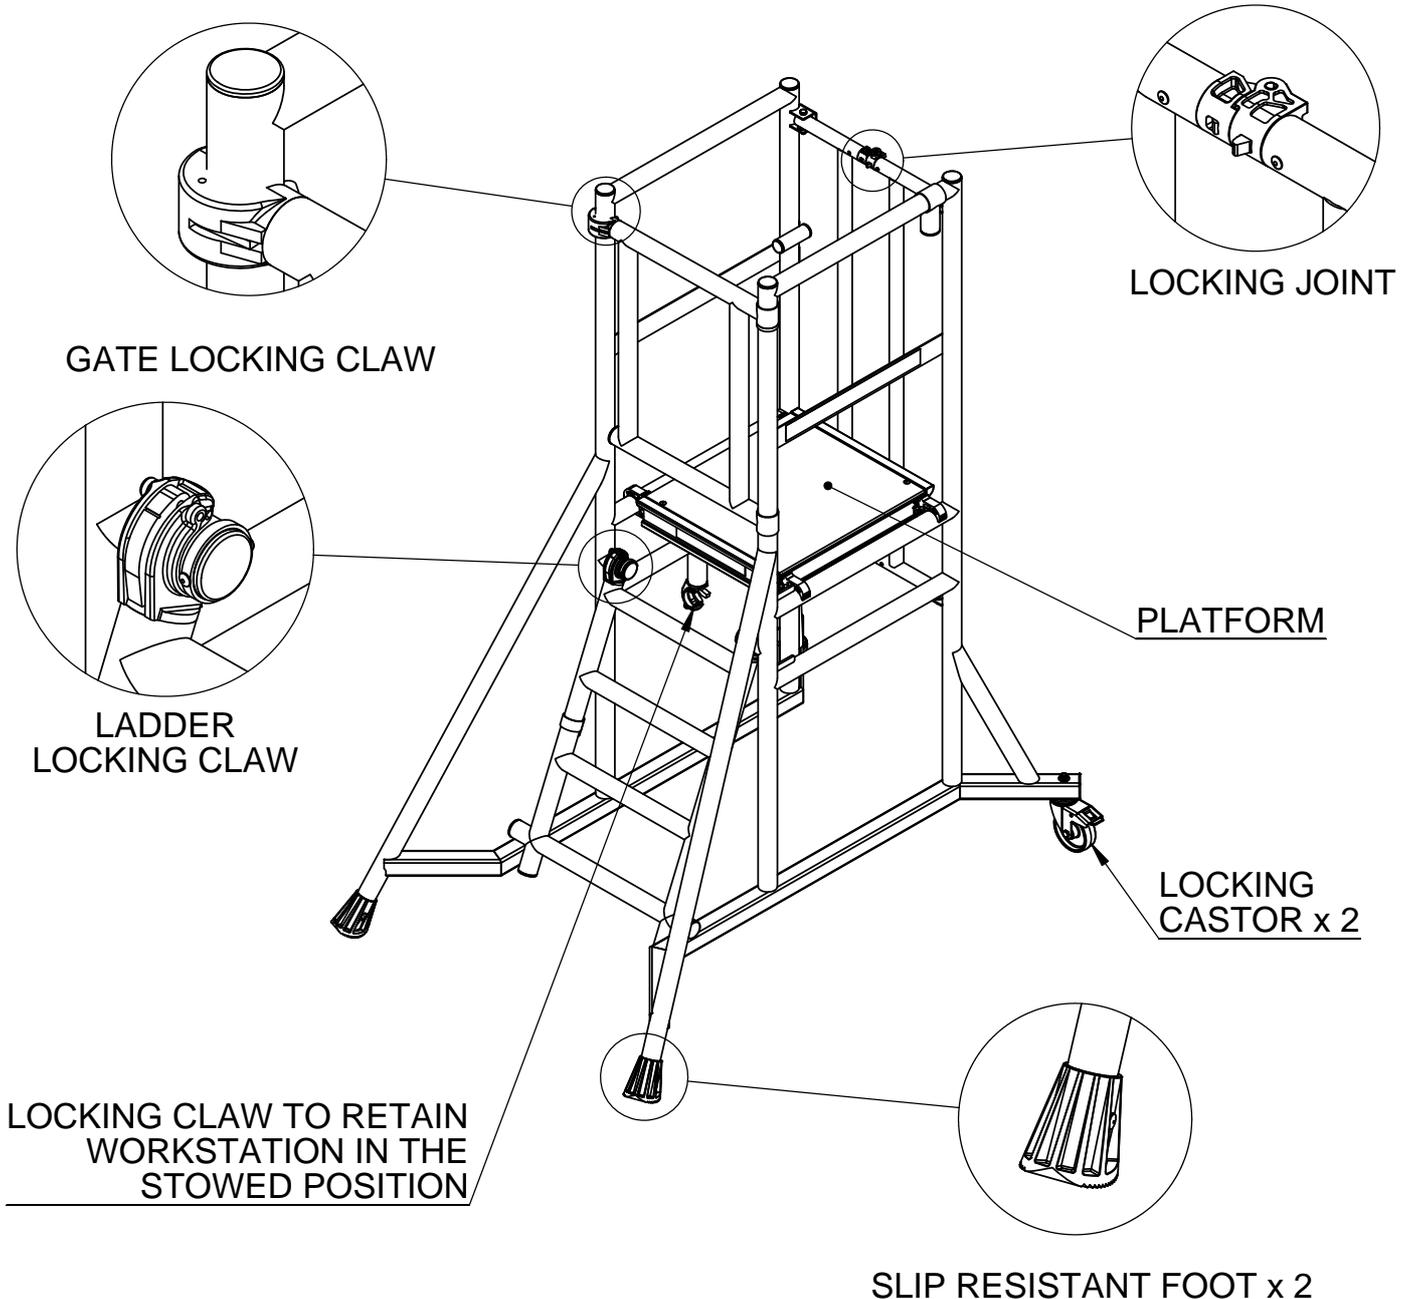

<u>Material</u>	<u>Where used</u>
- ϕ 50.8 Aluminium extruded tube	Right and left hand side frames, Ladder and Gate
- 51.9 Square Aluminium extruded tube	Base section
- ϕ 38.1 Aluminium extruded tube	Rear folding frame
- Aluminium extruded sections	Platform cross members and side members
- Aluminium pressure die castings	Locking joint in rear folding frame
- Aluminium gravity die castings	Gate claw, Ladder claws, Stowing claws and tee
- Plastic	Tube end plugs, Castor wheel
- Pressed steel	Castor body
- Rubber	Outer surface of castor wheel
- 10mm Wisadeck board	Platform decking material

ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED