

TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPR 25/40, BPR 25/40 D



Robust and reliable
Best component protection




Precise and save to operate
BOMAG single lever control



Simple and safe transport
Transport wheels (optional)

Shipping dimensions in cub.yd

BPR 25/40 0.503
BPR 25/40 D 0.563

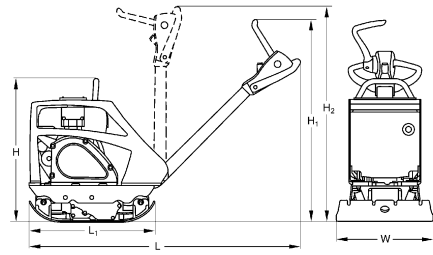

Standard Equipment

- Protective engine covering
- Single lever control
- Low vibration steering rod
- Height adjustable steering rod
- Steering rod lockable in transport and working position
- Vibration and throttle regulation on the steering rod
- Highly wear resistant base plate
- Fully protected V-belt
- Recoil starter
- Back-up drive protection
- Automatic shutdown at low oil level
- 3-2-1 Warranty

Optional Equipment

- Sprinkler system (+28.7lb)
- Tool kit
- Special painting
- Plastic mat
- Transport wheels, puncture-proof (+8.8lb)
- Service Kit
- US Version EPA 4 NRTC (BPR25/40D)
- TOUGH WARRANTY

Dimensions in in

	H	H1	H2	L	L1	W
BPR 25/40	26.0	34.3	48.0	57.5	25.6	15.7
BPR 25/40 D	29.1	34.3	48.0	57.5	25.6	15.7

Technical Data

Weights

Operating weight CECE (W)	lb	298
Basic weight	lb	291

Dimensions

Basic working width	in	15.7
Lowest passing height	in	26.0
Min. height w. steering in top position	in	34.3
Max. height w. steering in top position	in	47.2

Driving Characteristics

Working speed, max.	ft/min	82.0
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer	Honda
Type	GX 160
Emission stage	CARB Phase III
Cooling	air
Number of cylinders	1
Performance SAE J 1349	4.8 hp
Speed	3,600 min-1
Drive system	mech.
Fuel	gasoline
Fuel comsump. aver. during operation	0.3 gal/h

Exciter system

Frequency	vpm	5,100
Centrifugal force	lb	5,620
Amplitude	in	0.061

Capacities

Fuel	gal	0.8
Water	gal	3.2

Technical modifications reserved. Machines may be shown with options.

BOMAG

BPR 25/40

BOMAG

BPR 25/40 D

298

291

15.7

26.0

34.3

47.2

82.0

30

Honda

GX 160

CARB Phase III

air

1

4.8

3,600

mech.

gasoline

0.3

gal/h

5,100

5,620

0.061

gal

3.2

331

324

15.7

29.1

34.3

47.2

82.0

30

Hatz

1B20

non EPA

air

1

4.2

3,000

mech.

diesel

0.2

5,100

5,620

0.061

gal

3.2



PRUS 692 65 010

190916 Sa

BOMAG Americas, Inc.
 125 Blue Granite Parkway
 Ridgeway, SC 29130
 USA
 Tel. +1 803 3370700
 Fax +1 803 3370800
 www.bomag.com/us

